NVR 16-channel, 8TB, PoE

R004.11.00

Video/ Audio input	IP Video input	16-channel
	Incoming bandwidth	160 Mbps
	Outgoing bandwidth	160 Mbps
Video/ Audio output	HDMI output resolution	4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60H
	VGA output resolution	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Audio output	1-channel, RCA (Linear, 1 KΩ)
Decoding	Decoding format	H.265/H.265+/H.264/H.264+/MPEG4
	Recording resolution	8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF /CIF/QCIF
	Synchronous playback	16-channel
	Capability	2- channel @ 8 MP (25fps) / 4- Kanäle @ 4MP (30fps) / 8- Kanäle @ 1080p (30fps)
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTP
Hard disk	Connection	2 SATA interfaces
	Capacity	Up to 6 TB capacity for each HDD
	Built-in storage	2x 4 TB
External interface	Two-way audio	1-channel, RCA (2.0 Vp-p, 1kΩ)
	Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
	USB interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
	Alarm in/out	4/1
PoE interface	Interface	16 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces
	Power	≤ 200 W
	Supported standard	IEEE 802.3 af/at
General	Power supply	100 to 240 V/AC
	Power Consumption (without hard disk)	≤ 280 W ≤ 15 W (without enabling PoE)
	Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working humidity	10 to 90 %
	Dimensions (W x D x H)	385 × 315× 52 mm (15.2" × 12.4" × 2.0")
	Weight (incl. hard disk)	3 kg (6.6 lb)

Physical interfaces

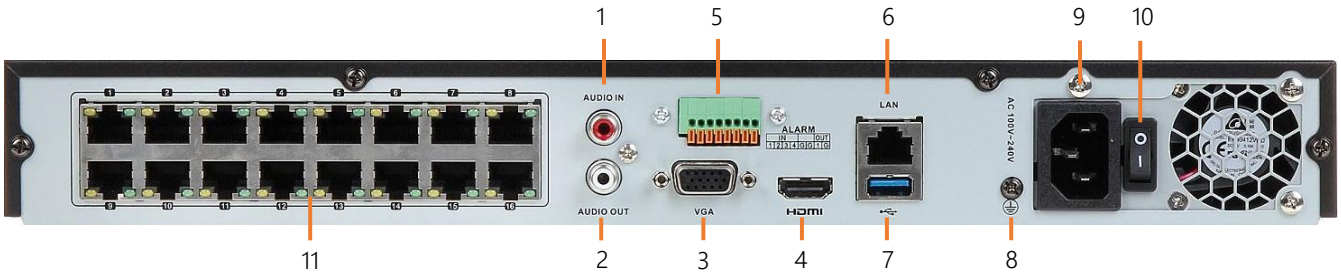

Index	Description	Index	Description
1	Audio In	7	USB 3.0 interface
2	Audio Out	8	Ground (GND)
3	VGA interface	9	100 to 240 V/AC power supply
4	HDMI interface	10	Power switch
5	Controller Port, Alarm In/Out	11	Network interfaces with PoE function
6	LAN network interface		